

F-RM Series Reduced Maintenance Flipaway

SPECIFICATIONS


MODEL	LIFTING CAPACITY	PLATFORM LOAD AREA	STANDARD RAMP	APPROX. WEIGHT
F-20RM	2500 lbs.	38" x 72"	4"	850 lbs.
F-20RM	2500 lbs.	42" x 72"	None*	850 lbs.
FW-20RM	2500 lbs.	42" x 72"	Wedge	850 lbs.
F-30RM	3000 lbs.	38" x 72"	4"	925 lbs.
F-30RM	3000 lbs.	42" x 72"	None*	925 lbs.
FW-30RM	3000 lbs.	42" x 72"	Wedge	925 lbs.

OPTIONAL EQUIPMENT

- **Hand-Held SUPER SWITCH® Control** allows driver to operate the liftgate from inside or out.
- **12" Folding Ramp with Cart Retention System** (on non-ramped platforms)
- **Remote Pump Mounting Kit** offers the flexibility to install the pump unit independent from the liftgate mount assembly when mounting space or ground clearance is an issue. (Recommended for low-bed height mounting applications).
- **Long Arm for 54"-60" bed heights** (on F-20RM and FW-20RM models)
- **Power-Down Operation** for consistent performance regardless of weather conditions or temperature.
- **Cab Shut-Off Switch** allows operator to shut off power to control switches, preventing unauthorized use of the liftgate.
- **Dual Controls** (street-side control) for added driver convenience.
- **Heavy-Duty or Super-Duty Steel Dock Bumpers** protect the liftgate from damage caused by backing into loading docks.
- **Snubber Kit** reduces potential liftgate wear caused by vibration during travel.
- **Customized Options** for specific applications. WALTCO'S Custom Solutions team can modify the F-RM Series Conventional Liftgate to meet your specific delivery requirements.

MOUNTING REQUIREMENTS (APPROX.)

BED HEIGHT RANGE	"A" DIMENSION	MOUNT FRAME CLEARANCE**
42"-49"	19.5"-21"	37.75"-38.75"
49"-54"	22"-23.25"	36.25"-37.25"

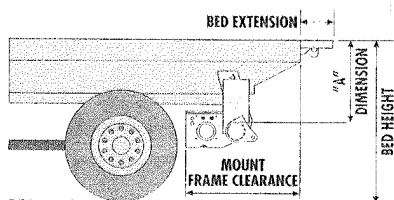

* Optional 12" folding ramp available

** Mount frame clearance can be decreased by up to 10 inches when remote pump mounting kit option is used.

Standard Features Ensure Reliable Performance, Ease Of Use, And Enhanced Productivity

- Reduced maintenance bearings with:
 - Self-lubricating, fiberglass-reinforced Teflon™-coated bearings in place of grease zerks.
 - Closed-loop hydraulic system with hydraulic cylinders manufactured and tested in-house by WALTCO.
 - Hardened pins that reduce deflection and prolong bearing life.
- **SUPER SWITCH®** control is magnetically activated and built of durable plastic to guard against corrosion or damage from normal wear and tear. A recessed lever prevents the switch from being inadvertently activated.
- Rugged wide arm design for stable support in any loading situation.
- Hydraulic power up and gravity lowered operation.
- Wide 72" platform widths with spring-assisted operation.
- Dependable hydraulic cylinders manufactured and tested by WALTCO.
- A three-year warranty on **SUPER SWITCH®** electro-hydraulic components and liftgate mechanism.
- **THERMALPAK® with VOLTAGE GUARD™**, WALTCO's exclusive thermally protected power unit alerts the operator before heat build-up or low voltage due to a bad ground can cause permanent damage to the electrical components. This feature minimizes costly downtime and repairs.
- Heavy duty solenoid that resists corrosion and welding of internal contacts.
- Compliance with all TMC's Recommended Wiring Practices.
- Weather-resistant enclosure.
- Adjustable flow control valve for lowering speed control.
- 150-amp circuit breaker protection.
- Powder coat finish on key liftgate components produces a high-quality finish that is exceptionally resistant to corrosion and abrasion.



WALTCO
HYDRAULIC LIFTGATES



MADE IN USA

CONTACT THE LIFTGATE PROFESSIONALS...

PHONE: (800) 211-3074

FAX: (800) 211-3075

WWW.WALTCO.COM

CORPORATE OFFICES

285 Northeast Ave.
Tallmadge, OH 44278

CALIFORNIA
Gardena, CA

GEORGIA
Marietta, GA

TEXAS
Dallas, TX

WE'RE BEHIND YOU ALL THE WAY.

©Copyright 2007, Waltco

0702 5M