



Unit Shown with Optional Cable Handling Package



Easy Access from the Ground

- **Up to 40.7 ft (12.4 m) of Working Height**
- **Up to 29.4 ft (9.0 m) Side Reach**
- **Platform Capacity 500 lb (227 kg)**
- **Sideload Capacity 600 lb (272 kg)**
- **Large Platform, 29 x 29 x 43.5 in (737 x 737 x 1105 mm)**
- **Single Handle Fully Proportional Controller**
- **Mounts on a Non-CDL 84 in (2134 mm) CA Chassis**
- **Optional 5000 lb (2268 kg) Cable Reel Lifter/Driver**
- **Optional Cable Stringing Package**



Reel Lifter Goes to Ground for Ease of Loading Reels

STANDARD FEATURES

- Aerial Device with Boomrest
- Telescopic Steel Two Stage Boom, Hydraulically Extended (Non-Insulated)
- 370° Noncontinuous Rotation
- Hydraulic Platform Leveling
- Platform, End-Mounted Steel 29 x 29 x 43.5 in (737 x 737 x 1105 mm) with Impact Wrench Holder
- Fixed Mounted Arms for Pulling Eye and Optional Fairlead
- Pulling Eye
- Platform Capacity 500 lb (227 kg)
- Sideload Capacity 600 lb (272 kg)
- Single Handle Fully Proportional Control
- Engine Start/Stop
- Two Way Voice Communications System
- 120 VAC Electric Circuit at the Boom Tip
- Open Center Hydraulic System
- Pendant Mounted Lower Controls
- 2000 lb (907 kg) Lifting Eye on the Boom
- Emergency Lowering Valve at Platform

RECOMMENDED FEATURES

- Fall Protection System
- Wheel Chocks for Stationary Operation

GENERAL SPECIFICATIONS

Working Height	40.7 ft	12.4 m
Ground to Bottom of Platform	35.7 ft	10.9 m
Boom Articulation	-20° to +80°	
Maximum Side Reach	29.4 ft	9.0 m
Reel Lifter, Capacity	5000 lb	2268 kg
Maximum Reel Diameter	84 in	2134 mm
Maximum Reel Width	48 in	1219 mm

Based on 40 in (1016 mm) chassis frame height




Optional Capstan Winch and 500 lb Reel Loader/Driver

OPTIONS

- Fairlead at Platform
- Reel Lifter, 5000 lb (2268 kg) Lift Capacity
- Cable Stringing Bull Wheel System
- Strand Carrier and Towline Winch (Note) Optional Stringing System and Strand Carrier/Towline Require Different Boomrest
- "D" Block Storage Bracket for Platform
- Platform Curtains
- Heater at Platform
- Secondary Stowage System
- Capstan Winch Mounted on Reel Lifter Arm

REACH DIAGRAM

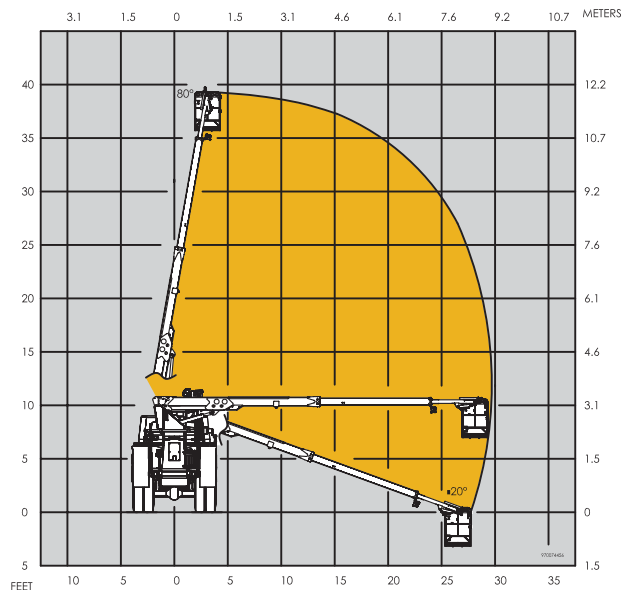

Single Handle Fully Proportional Controls