



Altec AT237 Telescopic/Articulating Aerial Device



- Unique Articulating Arm Provides Superior Height and Side Reach Capability
- Up to 42.5 ft (13.0 m) Working Height
- Up to 28.3 ft (8.6 m) Side Reach
- Platform Capacity to 400 lb (181 kg)
- Easily Mounted on 15,000 lb (6804 kg) GVWR Chassis



Easy Access From Ground



Access to Body Compartments From Platform

STANDARD FEATURES

- Telescopic/Articulating Non-Insulated Aerial Device
- Compensated Articulating Arm
- Hydraulic Boom Extension
- Pendant Lower Controls
- Non-continuous 370° Rotation
- End-mount Platform 26 x 30 x 42 in (660 x 762 x 1067 mm) Nominal
- Hydraulic Platform Leveling
- Platform Capacity to 400 lb (181 kg)
- Variable Speed Controls
- Engine Start/Stop at Upper and Lower Controls
- Manual Lowering Valve
- Open Center Hydraulic System
- 120 VAC Circuit in Boom With GFI Outlet at the Platform

GENERAL SPECIFICATIONS

Ground to Bottom of Platform*	37.5 ft	11.4 m
Working Height	42.5 ft	13.0 m
Maximum Side Reach	28.3 ft	8.6 m
Stowed Travel Height	10.0 ft	3.0 m
Boom Articulation Lower Boom Articulation Arm	-25° to +75° -7° to +90°	
Rotation	Non-continuous 370°	
Weight of Unit	2160 lb	980 kg

*Based on 40 inch (1016 mm) Chassis Frame Height

Altec Aerial Devices meet or exceed all applicable ANSI Standards as of the date of manufacture. Altec reserves the right to improve models and change specifications without notice or obligation.



Optional Single Handle Proportional Controls



OPTIONS

- Secondary Stowage System
- Single Handle Proportional Controls
- Platform Cover
- Airline to Platform
- Canopy and Curtains
- Folding Seat
- Outriggers, Vertical
- Heater for Platform
- Tool Pouches and Trays

RECOMMENDED FEATURES

- Fall Protection System
- Wheel Chocks

REACH DIAGRAM

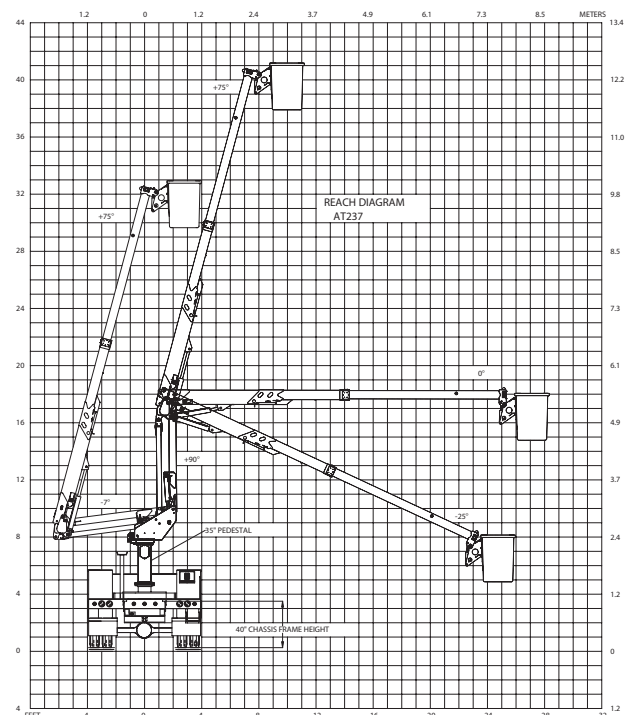

Low Stow Travel Height

Altec Sales and Service