



Maintainer

H7024 CRANE




specifications

short tower **tall tower**

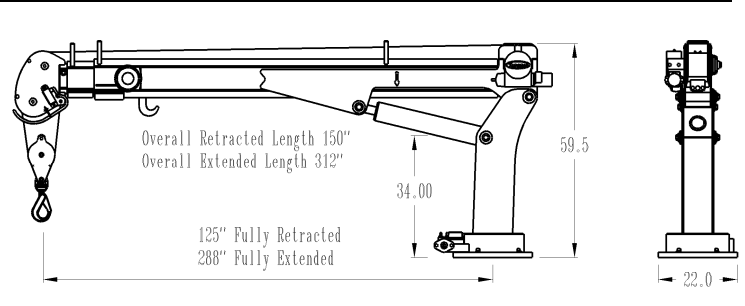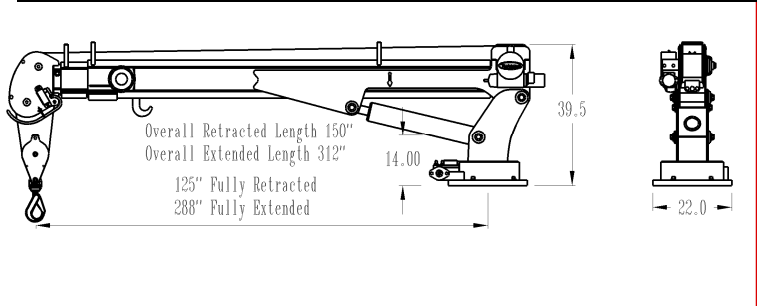

- **“Boom Mounted” Gear Winch—30 fpm**
- **Single Part Line (Dual Part Capable)**
- **Weight—1,700 lb.**
- **Total Operational Range 91 deg. (-13 to +78)**
- **Double Sheave Design**
- **Anti-Two Block Relocation (Inboard)**
- **User-friendly Snatch Block Storage**
- **120 ft. of 3/8 in dia. Steel Cable**
- **615 deg. of Continuous Rotation**
- **24 ft. Hydraulic Reach**
- **Hexagonal Boom**
- **Tall and Short Tower Configurations**
- **Closed-center/Load-sensing Hydraulic System**
- **OSHA 1910.180 / ANSI B30.5 Compliant**

ratings

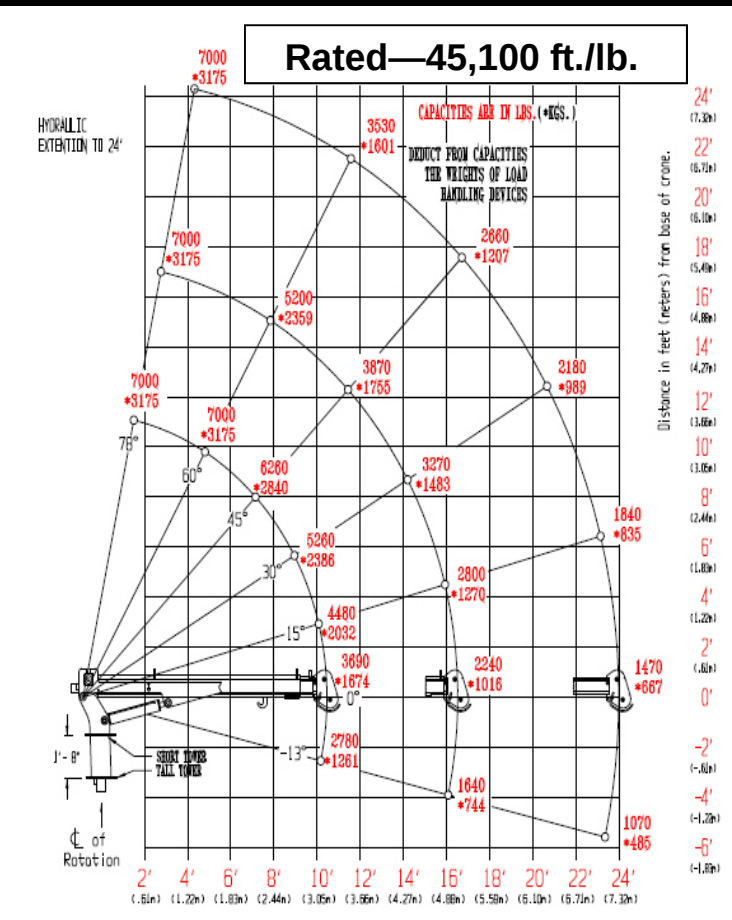

options

- **Wireless Remote Control System**
- **Planetary Winch—60 fpm**
- **Open-center Hydraulic System**