

Maintainer



CAUTION
UNLAWFUL TO OPERATE
THIS EQUIPMENT
WITHIN 10 FEET OF
HIGH VOLTAGE LINES OF
50,000 VOLTS OR LESS


DANGER
STAY CLEAR
OF SWAYING
ARM AND
CABLES




H6520 CRANE

specifications

short tower

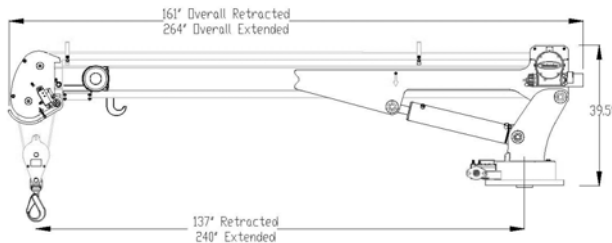

tall tower

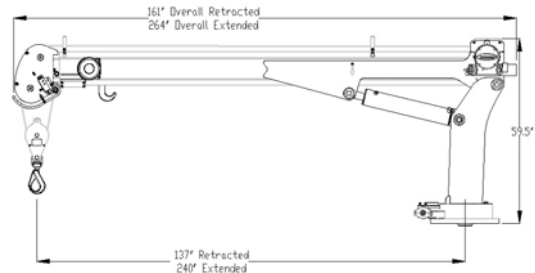


features

- “Boom Mounted” Gear Winch—30 fpm
- Dual Part Line (Single Part Capable)
- Weight—1,600 lb.
- Total Operational Range 91 deg. (-13 to +78)
- Double Sheave Design
- Anti-Two Block Relocation (Inboard)
- Wireless Remote Control System
- 105 ft. of 3/8 in dia. Steel Cable
- 615 deg. Rotation
- 20 ft. Hydraulic Reach
- Hexagonal Boom
- Tall and Short Tower Configurations
- Closed-center/Load-sensing Hydraulic System
- OSHA 1910.180 / ANSI B30.5 Compliant

ratings

Rated—38,000 ft./lb.

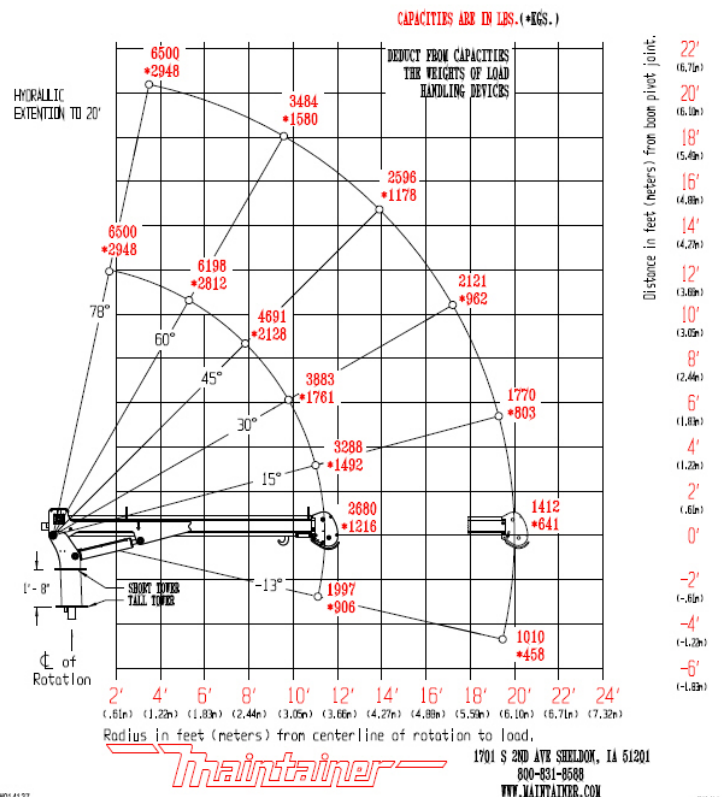

options

- LMI System
- Planetary Winch—60 fpm
- Open-center Hydraulic System