

ETC 36 SNT

Articulated / Telescopic Non-Insulated Model 41' Working Height



ETI[®]
EQUIPMENT TECHNOLOGY, INC.



EQUIPMENT TECHNOLOGY, INC.

ETC36SNT

GENERAL SPECIFICATIONS

	<u>ETC36SNT</u>
Height to Bottom of Bucket*	36'
Working Height	41'
Side Reach, End Mount	27' 1"
Lower Boom Articulation	0 to 93
Upper Boom Travel	17 to 75
Stowed Height	10'
Rated Capacity	300 lbs.

* based on 36" frame height

MINIMUM VEHICLE SPECIFICATIONS

GVWR	15,000 lbs.
C.A.	60 in.

STANDARD FEATURES

- 390 degrees Non-Continuous rotation
- Lower Boom Compensation link
- Hydraulic leveling via master/slave system providing a bucket dump for clean out and operator rescue.
- Shear ball rotation gear driven by external drive gear box
The gear box has an extended shaft for manual rotation
- Internally mounted holding valve (integral part of cylinder) locks cylinder in place in the event of hydraulic failure.
- All pins turn on replaceable bushings.
- Inner boom extends with double acting hydraulic cylinder for safety and performance.
- All hoses shall be inside boom and housed in a cat trac to prevent rubbing.
- Adjustable wear pads.
- Upper controls at platform provided by 12 volt DC system.
- Lower controls accessible from ground.


ETI manufactured equipment meets or exceeds OSHA, ANSI 92.2 and FMVSS standards at time of manufacture.

AVAILABLE OPTIONS

- Emergency Hydraulic Power (12 volt DC)
- Engine Start/Stop
- Electric Tool Circuit
- Two Speed Throttle
- Air Line to Bucket
- Oversize bucket, 24x30x42
- Bucket with door
- Outriggers
- 350 lbs. capacity
- Bucket cover

HYDRAULIC POWER OPTIONS

- Fanbelt Pump
- PTO/Pump
- Generator
- DC Power

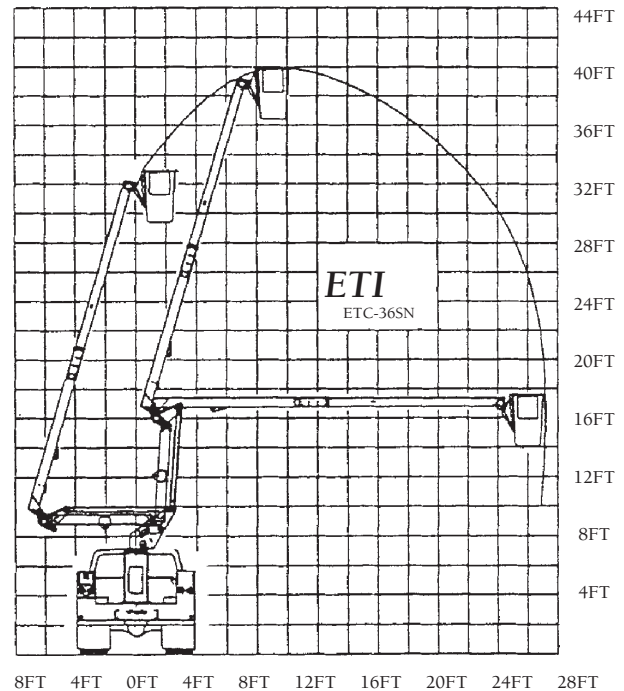

EQUIPMENT TECHNOLOGY, INC. 341 N.W. 122ND STREET OKLAHOMA CITY, OK 73114

TOLL FREE: 888/748-3841 FAX: 405/755-6829

WWW.ETI1.COM

10/02

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.