

E-RM SERIES

REDUCED MAINTENANCE FLIPAWAY

*Easy to Operate, Easy to
Maintain, Convenient
to Store*

Now
Accommodates
Bed Heights
As Low As
38 Inches!

The WALTCO E-RM Series Flipaway has a large, gently sloped, spring-assisted platform that lets you move products easily and efficiently. The platform conveniently flips away under the truck body for unobstructed dock loading.

46" deep wedge platform shown



LIFTING CAPACITIES:

2500 lb. and 3000 lb.

**Standard Features Reduce
Operating Costs and
Increase Efficiency:**

Self-lubricating, fiberglass-reinforced Teflon™-coated bearings eliminate need for grease zerks.



Parting Bar along with Torsion Spring Assist and Torsion Bar allow platform to be folded with less than 25 lbs. of force.



(Optional) Steel Dock Bumper w/step and Rubber Pad.



STANDARD FEATURES:

- **Thermally protected power unit** safeguards liftgate motor from damage due to heat build-up.
- **Reduced maintenance bearings** with:
 - Self-lubricating, fiberglass-reinforced Teflon™-coated bearings in place of grease zerks.
 - Closed-loop hydraulic system with hydraulic cylinders manufactured and tested in-house by WALTCO.
 - Hardened pins that reduce deflection and prolong bearing life.
- **Electropak® power unit** features adjustable flow control valve and weather-resistant cover. **Electropak®** complies with all TMC recommended wiring practices.
- **Lock-out device** deters unauthorized use.
- **Platform safety hook** automatically engages when the platform is raised to the stored position.
- **Three-year warranty** on the liftgate mechanism and a two-year warranty on **Electropak®**.
- **150-amp circuit breaker**
- **Torsion spring assist** on first platform section and torsion bar on second section allow the platform to be folded with less than 25 lbs. of force. Standard on 80" width only.
- **Powder coat finish** on key liftgate components produces a high-quality finish that is exceptionally resistant to corrosion and abrasion.



Stowed Position



WE'RE BEHIND YOU ALL THE WAY®


SPECIFICATIONS:

MODEL	LIFTING CAPACITY	PLATFORM LOAD AREA	STANDARD RAMP	APPROX. WEIGHT (IN LBS.)
E-25RM	2500 lbs.	36" x 72"	6"	695 lbs.
EW-25RM	2500 lbs.	40" x 72"	WEDGE	695 lbs.
E-25RM	2500 lbs.	36" x 80"	6"	745 lbs.
EW-25RM	2500 lbs.	40" x 80"	WEDGE	745 lbs.
EW-25RM	2500 lbs.	46" x 80"	WEDGE	770 lbs.
E-30RM	3000 lbs.	36" x 72"	6"	715 lbs.
EW-30RM	3000 lbs.	40" x 72"	WEDGE	715 lbs.
E-30RM	3000 lbs.	36" x 80"	6"	760 lbs.
EW-30RM	3000 lbs.	40" x 80"	WEDGE	760 lbs.
EW-30RM	3000 lbs.	46" x 80"	WEDGE	795 lbs.

MOUNTING REQUIREMENTS:

BED HEIGHT RANGE*	"A" DIMENSION	MOUNT FRAME CLEARANCE
38"-42"	19.5"	36-3/8"
42"-50"	21"	35"
50"-54"	23.75"	32"


*See installation manual or contact factory for exact mounting dimensions.

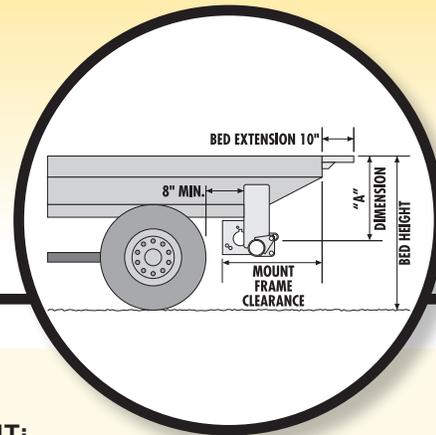

PLATFORM RIDES:


E-25RM, E-30 RM

Half Dip Ride

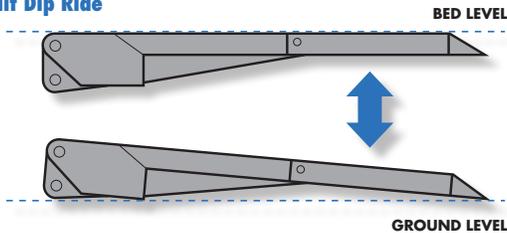

EW-25RM, EW-30 RM

Full Dip (Wedge Platform)

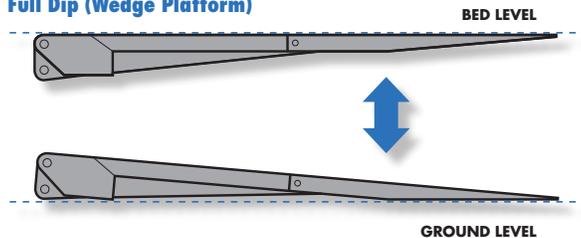

CONTACT THE LIFTGATE PROFESSIONALS...



Phone: (800) 211-3074
FAX: (800) 211-3075
WWW.WALTCO.COM

CORPORATE OFFICES
 285 Northeast Ave.
 Tallmadge, OH 44278

CALIFORNIA
 Gardena, CA

GEORGIA
 Marietta, GA

TEXAS
 Dallas, TX

OPTIONAL EQUIPMENT:

- **Hand-Held Pendant Control** allows driver to operate the truck from the ground or bed level.
- **Remote Pump Mounting Kit** offers the flexibility to install the pump unit independent from the liftgate mount assembly when mounting space is an issue. (Recommended for low-bed height mounting applications)
- **Walk Ramp Installation Kit for Bed Heights 42"- 54" only** allows liftgate to be used in conjunction with slide out walk ramp.
- **Power-Down Operation** for consistent performance regardless of weather conditions or temperature.
- **Cab Shut-Off Switch** allows operator to shut off power to control switches, preventing unauthorized use of the liftgate.
- **Dual Controls** (street-side control) for added driver convenience.
- **Heavy-Duty or Super-Duty Steel Dock Bumpers** protect the liftgate from damage caused by backing into loading docks.
- **Snubber Kit** reduces potential liftgate wear caused by vibration during travel.
- **Receiver-style hitch** (Class IV - 10,000 lb. rating with 1,000 lb. tongue weight) adds trailer towing versatility to vehicles with E-RM Series liftgates. (Draw bar and ball hitch not included)
- **Draw Bar Kit** (Class III) gives 13" ball height range flexibility. (Ball hitch not included)
- **Customized Options** for specific applications. WALTCO's Custom Solutions team can modify the E Series to meet your specific delivery requirements.