



FOR NEW EQUIPMENT SALES, CALL  
**800.958.2555**  
TO SPEAK WITH AN ALTEC REPRESENTATIVE  
or visit us online at [altec.com](http://altec.com)

**Altec**  
TELESCOPIC ARTICULATING  
AERIAL DEVICE

## FEATURES

- Non-Insulating Aerial Device
- All Steel Telescopic Articulating Boom Construction
- Hydraulically Extended Inner Boom
- Engine Start/Stop at Upper and Lower Controls
- Open-Center Hydraulic System
- 120 VAC Circuit at Boom Tip with GFI Outlet
- Minimum Chassis Requirement of 15,000 lb (6,804 kg) GVWR  
60 in (1,524 mm) CA or 84 in (2,134 mm) CA

## OPTIONS


- Pedestal or Bridge Mount
- Choice of Platform:
  - » Side or End-Mount
  - » Walk-In Round or Rectangular Splicer
- Hydraulic Leveling
- Proportional Electric/Hydraulic Single-Handle Upper Control
- Inverter for 110V Power
- Choice of Hydraulic Reservoir:
  - » Bed-Mount
  - » Pedestal-Mount
- Airline to Platform
- Canopy and Curtain Assembly
- Secondary Stowage System
- Heater for Platform
- Seat for Platform
- Tool Pouches and Trays
- Fiberglass and Steel Body Configurations are Available

Recommended safety equipment, available through Altec Supply, include fall protection system and wheel chocks.

| SPECIFICATIONS                | Ground to Bottom of Platform              |                                    |
|-------------------------------|---|------------------------------------|
|                               | End-Mount<br>(at Platform Height)         | 35.3 ft (10.7 m)<br>8.0 ft (2.4 m) |
|                               | Side-Mount<br>(at Platform Height)        | 35.0 ft (10.7 m)<br>6.5 ft (2.0 m) |
|                               | Working Height                            |                                    |
|                               | End-Mount                                 | 40.3 ft (12.3 m)                   |
|                               | Side-Mount                                | 40.3 ft (12.3 m)                   |
|                               | Maximum Reach from Centerline of Rotation |                                    |
|                               | End-Mount                                 | 26.5 ft (8.1 m)                    |
|                               | Side-Mount                                | 24.9 ft (7.6 m)                    |
|                               | Platform Capacity                         |                                    |
| End-Mount                     | 350 lb (159 kg)                           |                                    |
| Side-Mount                    | 350 lb (159 kg)                           |                                    |
| Articulating Arm Articulation |   |                                    |
|                               | -0 to 79°                                 |                                    |
| Boom Articulation             |   |                                    |
|                               | -25 to 78°                                |                                    |
| Stowed Travel Height          |   |                                    |
|                               | 10.9 ft (3.3 m)                           |                                    |
| Rotation                      |   |                                    |
|                               | Non-Continuous, 370°                      |                                    |



## REACH DIAGRAM

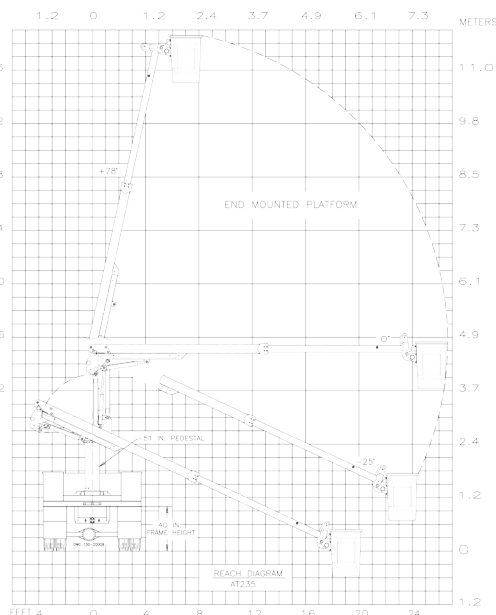

## EASY GROUND TO PLATFORM ACCESS



## EXCEPTIONAL VERTICAL REACH



For more complete information on Altec products and services, visit us on the web at [www.altec.com](http://www.altec.com). Material and specifications are subject to change without notice. Featured units in photos may include optional features. Please contact an Altec representative for all available options. Altec® and the Altec logo are registered trademarks of Altec Inc. in the United States and various other countries and may not be used without permission.  
© 2015 Altec Inc. All Rights Reserved. AIOSAT235-0315-v1

