



FOR NEW EQUIPMENT SALES, CALL
800.958.2555
TO SPEAK WITH AN ALTEC REPRESENTATIVE
or visit us online at altec.com


TELESCOPIC ARTICULATING
AERIAL DEVICE

FEATURES

- Non-Insulating Aerial Device
- All Steel Telescopic Articulating Boom Construction
- Hydraulically Extended Inner Boom
- Engine Start/Stop at Upper and Lower Controls
- Open-Center Hydraulic System
- 120 VAC Circuit at Boom Tip with GFI Outlet
- Minimum Chassis Requirement of 15,000 lb (6,804 kg) GVWR
60 in (1,524 mm) CA or 84 in (2,134 mm) CA

OPTIONS


- Pedestal or Bridge Mount
- Choice of Platform:
 - » Side or End-Mount
 - » Walk-In Round or Rectangular Splicer
- Hydraulic Leveling
- Proportional Electric/Hydraulic Single-Handle Upper Control
- Inverter for 110V Power
- Choice of Hydraulic Reservoir:
 - » Bed-Mount
 - » Pedestal-Mount
- Airline to Platform
- Canopy and Curtain Assembly
- Secondary Stowage System
- Heater for Platform
- Seat for Platform
- Tool Pouches and Trays
- Fiberglass and Steel Body Configurations are Available

Recommended safety equipment, available through Altec Supply, include fall protection system and wheel chocks.

| SPECIFICATIONS | Ground to Bottom of Platform | |
|-------------------------------|---|------------------------------------|
| | End-Mount (at Platform Height) | 35.3 ft (10.7 m) 8.0 ft (2.4 m) |
| | Side-Mount (at Platform Height) | 35.0 ft (10.7 m) 6.5 ft (2.0 m) |
| | Working Height | |
| | End-Mount | 40.3 ft (12.3 m) |
| | Side-Mount | 40.3 ft (12.3 m) |
| | Maximum Reach from Centerline of Rotation | |
| | End-Mount | 26.5 ft (8.1 m) |
| | Side-Mount | 24.9 ft (7.6 m) |
| | Platform Capacity | |
| End-Mount | 350 lb (159 kg) | |
| Side-Mount | 350 lb (159 kg) | |
| Articulating Arm Articulation | | |
| | -0 to 79° | |
| Boom Articulation | | |
| | -25 to 78° | |
| Stowed Travel Height | | |
| | 10.9 ft (3.3 m) | |
| Rotation | | |
| | Non-Continuous, 370° | |



REACH DIAGRAM

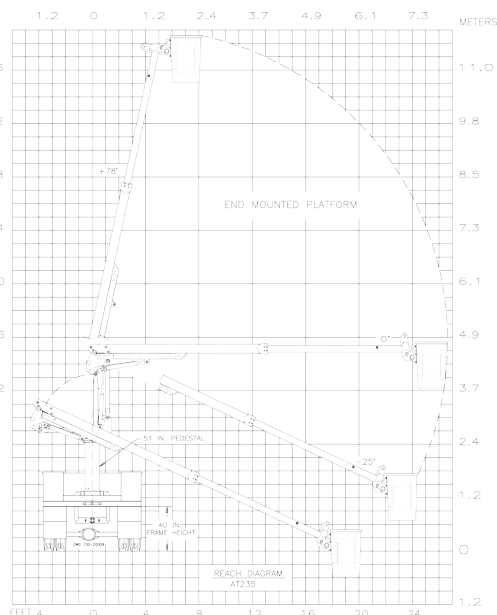

EASY GROUND TO PLATFORM ACCESS



EXCEPTIONAL VERTICAL REACH



For more complete information on Altec products and services, visit us on the web at www.altec.com. Material and specifications are subject to change without notice. Featured units in photos may include optional features. Please contact an Altec representative for all available options. Altec® and the Altec logo are registered trademarks of Altec Inc. in the United States and various other countries and may not be used without permission.
© 2015 Altec Inc. All Rights Reserved. AIOSAT235-0315-v1

