

## STANDARD FEATURES

- Non-Insulated Aerial Device
- All Steel Boom Construction
- Hydraulically Extended Boom
- Noncontinuous Rotation
- Engine Start/Stop at Upper and Lower Controls
- Open Center Hydraulic System
- 120 VAC Circuit in Booms with Outlets at the Platform
- Can Mount on a 15,000 lb (6804 kg) GVWR Chassis, 60 in (1524 mm) CA

## GENERAL SPECIFICATIONS

Ground to Bottom of Platform* —		
End-Mounted Platform	35.0 ft	10.7 m
(@ reach from centerline)	8.0 ft	2.4 m
Side-Mounted Platform	34.9 ft	10.6 m
(@ reach from centerline)	6.5 ft	2.0 m
Working Height* —		
End-Mounted Platform	40.0 ft	12.2 m
Side-Mounted Platform	39.9 ft	12.2 m
Maximum Reach from Centerline of Rotation to Lip of Platform —		
End-Mounted Platform	26.5 ft	8.1 m
Side-Mounted Platform	24.9 ft	7.6 m
Stowed Travel Height, approximate*	10.9 ft	3.3 m
Platform Capacity —		
End-Mounted	350 lb	159 kg
Side-Mounted	350 lb	159 kg
Articulating Arm	0° to 90°	
Boom Articulation	-25° to 78°	
Rotation	370° Noncontinuous	



\*Based on 40-inch (1016 mm) Chassis Frame Height

Altec Industries, Inc. reserves the right to improve models and change specifications without notice or obligation. Altec Aerial Devices meet or exceed all applicable ANSI Standards as of the date of manufacture.

## OPTIONS

- Pedestal or Bridge Mountings
- Choice of Platforms:
  - Side or End-Mounted
  - Walk-In Splicer or Rectangular
  - Gravity or Hydraulic Leveling
- Single or Two Speed Controls
- Choice of Reservoir:
  - Bed Mounted
  - Pedestal Mounted
- Airline to Platform
- Fall Protection System
- Canopy and Curtain Assembly
- Secondary Stowage System
- Heater for Platform
- Seat for Platform
- Tool Pouches and Trays
- Wheel Chocks

## REACH DIAGRAM

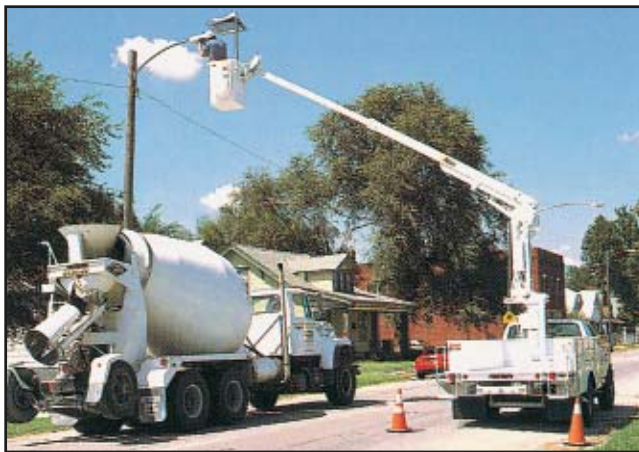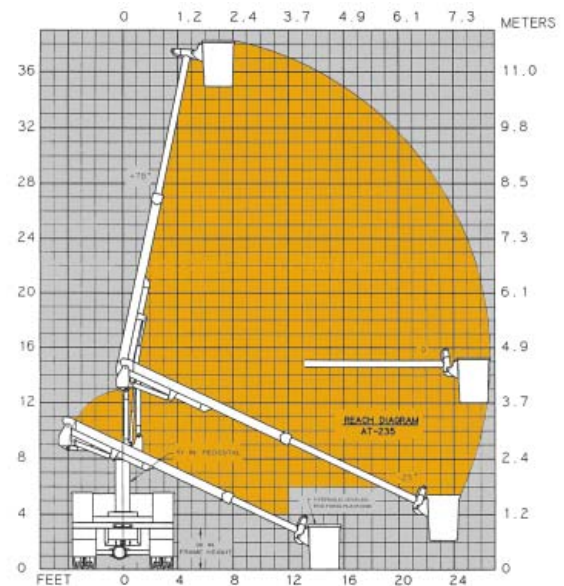

Altec Sales and Service

**Altec Industries, Inc.**

Post Office Box 10264  
Birmingham, Alabama 35202  
Phone 205/991-7733  
Fax 205/991-9993



Manufacturing and Service Facilities Located  
Throughout the United States and Canada