

"BEST"
BY FAR"

One Ton LP Gas Service Truck



Maintainer's newest model service body has been designed with the propane gas business in mind. The body includes a 6,350 lb. lift capacity crane with 24' feet of hydraulic reach; three compartments: 2 above deck and 1 underbody; 4-roll-out drawers and an 18-drawer small parts cabinet. The cargo area has 6 recessed tie-downs and full length tie-down rails on both sides to keep tanks secure when traveling.

The open cargo area was designed to facilitate loading and unloading of propane tanks and --with 24 feet of hydraulic crane boom extension-- even hard to reach tanks are a snap. Our rear crane mount also makes trailer loading easy.


Contact the Maintainer dealer nearest you for further details. We have a wide range of bodies, cranes and accessories to meet your needs.




1701 S. 2nd Ave, PO Box 349, Sheldon, IA 51201

For a dealer near you call toll free 800-831-8588, or 712-324-5001, fax 712-324-3526 or www.maintainer.com.

38,000 FT/LB
CRANE RATING

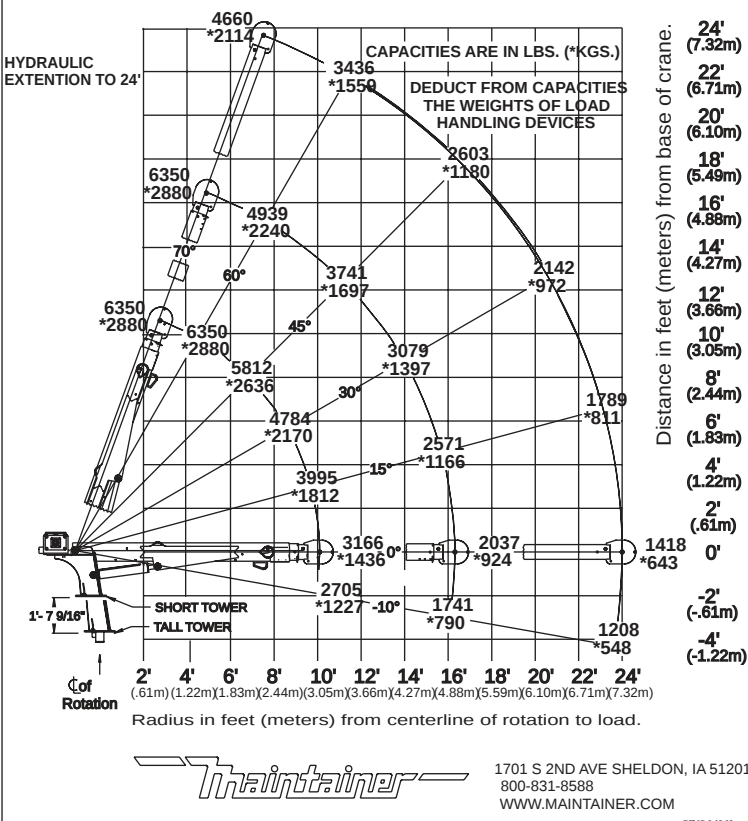

3824 REDUCED CAPACITY LOAD CHART

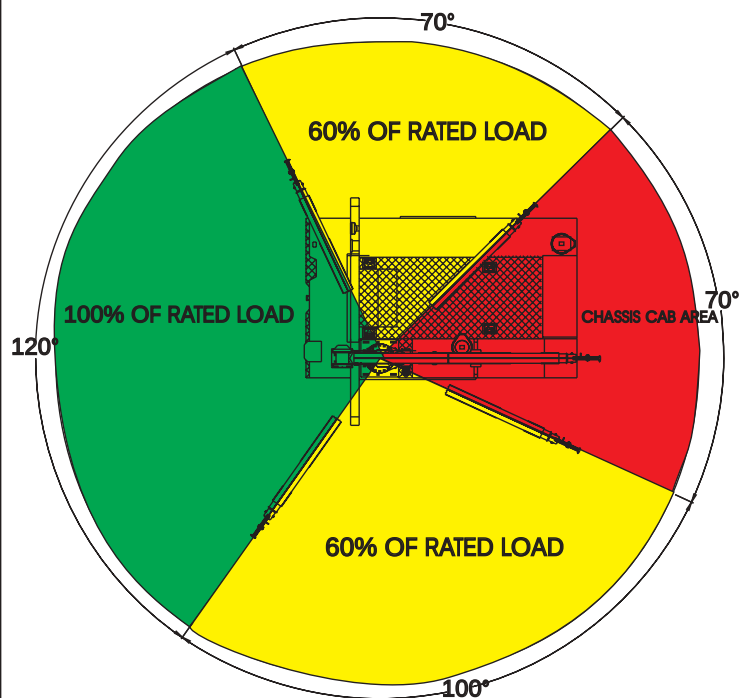

USE WHEN EQUIPPED WITH REAR OUTRIGGER PACKAGE ONLY

General Crane Performance Specifications:

38,000 FT/LB Crane rating

6,350 lbs. Maximum lift capacity (2,722 KGS.)

600 Degrees of rotation

Hydraulic boom extension to 24 feet

W inch:

38:1 Ratio worm gear winch with brake

120 Feet of 5/16" cable

ANSI winch drum

Hydraulic, high torque, winch motor

40.5:1 Ratio planetary winch with brake (optional)

Rotation:

Turntable slewing ring bearing

Modular worm drive with spur gear output,
190.4:1 ratio, self-locking

Hydraulic rotation powered by a high torque motor

Crane Physical Specifications:

64" Overall crane height with optional planetary winch (shown)

Wt. 1875 lbs.

22" x 22" Mounting space required

Mounting requires eight (8) 7/8-9 (GRD - 8) bolts

Hydraulic requirements: 6-8GPM @3000 PSI