



E SERIES

FLIPAWAY GATE

2,500 lb. and 3,000 lb. Capacities

Easy to Operate, Easy to Maintain, Convenient to Store




STANDARD E SERIES ADVANTAGES INCLUDE:


- New wider and deeper platform sizes

Steel Platforms:	Aluminum Platforms:
- 46" x 84" + 4" ramp	- 50" x 84" wedge with cart stops
- 40" x 84" + 4" ramp	- 44" x 84" wedge with cart stops
- 50" x 84" wedge	
- 44" x 84" wedge	
- Bed extension with reinforced angle along entire width makes installation easier and reduces dishing
- 36" to 56" bed height range
Note: Larger platform 46" + 4" & 50" wedge fits 39"(laden) – 56" bed height only
- Grease fittings and maintenance free bearings at all major hinge points
- Easier installation with preset "A" dimension. Pump and cylinder installed and tested at factory
- Roll pins replaced with bolts to allow easier maintenance.
- Underride option available
- Single and Dual cylinder models available with all the above features
- Snubber Kit reduces potential liftgate wear caused by vibration during travel
- Powder coat finish on key liftgate components produces a high-quality finish that is exceptionally resistant to corrosion and abrasion
- A full 3-year warranty on the entire liftgate

E-25, E-30 HALF-DIP RIDE

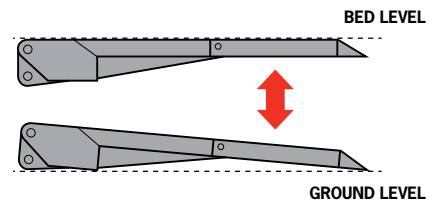

EW-25, EW-30 FULL DIP (WEDGE PLATFORM)

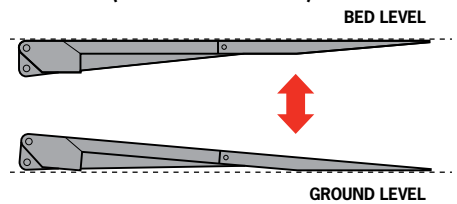

E Series Gate in stowed position

WALTCO

FLIPWAY GATE



Torsion Spring Assist Allows Platform to be Folded with Less Force.



Optional Steel Dock Bumper w/Step and Rubber Pad.

SPECIFICATIONS

Bed Ht: 36" - 56"

MODEL	CAPACITY	PLATFORM	RAMP
E-25	2,500 lbs.	40"x 84"	6"
EW-25	2,500 lbs.	44"x 84"	Wedge
E-25	2,500 lbs.	46"x 84"	6"
EW-25	2,500 lbs.	50"x 84"	Wedge
E-30	3,000 lbs.	40"x 84"	6"
EW-30	3,000 lbs.	44"x 84"	Wedge
E-30	3,000 lbs.	46"x 84"	6"
EW-30	3,000 lbs.	50"x 84"	Wedge
AP (Aluminum Platform)			
EW/AP-25	2,500 lbs.	44" x 84"	Wedge
EW/AP-25	2,500 lbs.	50" x 84"	Wedge
EW/AP-30	3,000 lbs.	44" x 84"	Wedge
EW/AP-30	3,000 lbs.	50" x 84"	Wedge

Note: "EW" denotes full-dip wedge style platform models.
The 46"+4" platform and the 50" wedge have a minimum bed height of 39" laden.

OPTIONAL EQUIPMENT:

- Hand-Held Pendant Control allows driver to operate the truck from the ground or bed level
- Remote Pump Mounting Kit offers the flexibility to install the pump unit independently from the liftgate mount assembly when mounting space is an issue (recommended for low-bed height mounting applications)
- Walk Ramp Installation Kit allows liftgate to be used in conjunction with slide out walk ramp (for bed heights 42"– 54" only)
- Power-Down Operation for consistent performance regardless of weather conditions or temperature (dual solenoid)
- Cab Shut-Off Switch allows operator to shut off power to control switches, preventing unauthorized use of the liftgate
- Dual Controls (street-side control) for added driver convenience
- Heavy-Duty or Super-Duty Steel Dock Bumpers protect the liftgate from damage caused by backing into loading docks
- Receiver-style hitch (Class IV - 10,000 lb. rating with 1,000 lb. tongue weight) adds trailer towing versatility to vehicles with E Series liftgates (Draw bar and ball hitch not included)
- Draw Bar Kit (Class III) gives 13" ball height range flexibility (Ball hitch not included)
- Optional Aluminum Wedge platforms have standard cart stops
- Customized Options – contact factory